

07-03-00

A



By Express Mail #EL636863066US

Attorney Docket No.: 4925-53

Check box if applicable: ☐ DUPLICATE



UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Assistant Commissioner for Patents
BOX PATENT APPLICATION
Washington, DC 20231

Dated: June 30, 2000

Sir:

Transmitted herewith for filing is the utility patent application of:

Inventor(s): Hannu NIEMINEN, Iikka SALMINEN, Timo TUOMISTO

For: Network and Method for Controlling Appliances

Enclosed are:

- Transmittal letter (2x) with Fee Computation Sheet
- General Authorization For Payment of Fees (2x)
- Title Page, Specification, Claims 1 to 40 & Abstract (23 pages [total number of pages of application])
- Unexecuted Declaration and Power of Attorney (3 p.)
- 3 sheet(s) of drawing(s) (Figs. 1 to 3)
- Check for \$ 1,050 for filing fee
- Return Receipt Postcard

☐ Please charge my Deposit Account No. 03-2412 in the amount of \$. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this application or credit any overpayment to Deposit Acct. No. 03-2412.

☒ Any additional filing fees required under 37 CFR 1.16.

☒ Any patent application processing fees under 37 CFR 1.17


☒ The issue fee set in 37 CFR 1.18 at 3 months from mailing of the Notice of Allowance, pursuant to 37 CFR 1.311 (b) provided the fee has not already been paid by check.

By Express Mail #EL636863066US

☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

☐ Priority is claimed for this invention and application, corresponding applications having been filed in on , No. , on , No. , on , No. , on , No. , on , No. , on , No. , respectively.

Respectfully submitted,
COHEN, PONTANI, LIEBERMAN & PAVANE

By: 
Alfred W. Froeblich
Reg. No. 38,887

551 Fifth Avenue, Suite 1210
New York, New York 10176
Tel: (212) 687-2770
Fax: (212) 972-5487

**APPLICATION FOR UNITED STATES
LETTERS PATENT**

NETWORK AND METHOD FOR CONTROLLING APPLIANCES

Inventors:

**Hannu NIEMINEN
Ilkka SALMINEN
Timo TUOMISTO**

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a local network for providing remote control of appliances incorporated in the network.

5

2. Description of the Related Art

With the development of more sophisticated household appliances and the increased use of wireless communication technology such as, for example, Bluetooth, it is envisioned that household appliances will be networked to interact or communicate within a local environment, e.g., a home or office. Personal wireless communication devices and handheld controllers such as mobile phones, personal digital assistants (PDAs) with a GSM card, etc., are convenient devices for controlling such appliances. However, most appliances still lack the processor power of, for example, full Java support needed for such advanced appliance control. Moreover, to obtain such interaction or interoperability among appliances, especially appliances from different manufacturers, complex standards and protocols must be adopted by the manufacturers so that a common "language" will be employed. This, however, is a further drawback because most appliance manufacturers prefer to develop and utilize separate and proprietary operating protocols for their appliances which are not interchangeable or useable with appliances from other manufacturers.

Accordingly, a local network is desired which provides for interoperability of appliances without the need for a common operating protocol.

SUMMARY OF THE INVENTION

The present invention is directed to a process and network for providing interaction and control of appliances in a common environment. Each appliance, e.g. coffee maker, VCR, dishwasher, room heating thermostat, etc., has an appliance control module (ACM) software application which is made available by the appliance manufacturer. A local wireless communication interface, such as Bluetooth, is integrated with each appliance for communicating with a local controller and server, such as a wireless communications device (e.g., mobile phone, PDA with GSM capability, etc.), which may, optionally, operate in conjunction with a local computer. The ACM is installed onto the local server and control of the corresponding appliance can then be performed by accessing the local server with the local controller, e.g., by use of a mobile phone.

In a preferred embodiment, each ACM is accessible from a remote location such as an Internet web site associated with the appliance manufacturer. Each appliance is equipped with a memory for storing a manufacturer internet address and, optionally, an appliance identification code such as a model or serial number. When an appropriate command is received by an appliance such as by an associated Bluetooth receiver, the appliance transmits a remote location address, e.g., an Internet web address such as a URL, of the appliance manufacturer to the local controller. Along with the URL, the appliance identifier such as a model and/or serial number may be communicated. This information is then used to access a remote server to obtain the appropriate appliance control module which will be installed on the local server for use in controlling the appliance.

In accordance with the present invention, the local server may be integrated into a mobile device or the mobile device may function as a user interface (UI) for accessing the local server.

In accordance with another embodiment of the present invention, the ACM may be a device independent module, e.g. Java Remote Method Invocation. Alternatively, as the remote appliance manufacturer server will recognize the type of operating system used by the local server due to the contact made by the local server, the ACM may be platform dependent binary code. Thus, based on the operating system platform used by the local server, an appropriate and compatible version of the ACM will be provided by the remote server.

Once the appropriate ACM is installed in the local server, the appliance can be controlled by accessing the ACM in an appropriate manner, such as by entering appropriate commands in a wireless device (e.g. mobile phone) which is in communication with the local server. Such communication may occur via a local communication link which may be a wireless or hard-wired link, or via an Internet connection such as when a mobile phone is used to access the local server via the Internet.

In a preferred embodiment, security functionality is provided or incorporated in the local server for user authentication prior to accessing the appliance.

Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings.

It is to be understood, however, that the drawings are designed solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be

made to the appended claims. It should be further understood that the drawings are not necessarily drawn to scale and that, unless otherwise indicated, they are merely intended to conceptually illustrate the structures and procedures described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, wherein like reference numerals denote similar elements throughout the views:

FIG. 1 is a schematic illustration of an appliance control network in accordance with a preferred embodiment of the present invention;

FIG. 2 is a schematic illustration of an appliance control network in accordance with an alternative embodiment of the present invention; and

FIG. 3 is a block diagram of the steps performed in the method of the present invention.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

FIG. 1 illustrates a presently preferred network 10 in accordance with the present invention. Network 10 includes a control block 12 containing a local controller 14, a local server 16, and a wireless local transceiver 18 for wirelessly communicating signals among a first appliance (A1) 22 and a second appliance (A2) 28 within the network 10. The appliances 22, 28 can be any variety of commonly-known appliances such as, for example, a dishwasher, coffee maker, VCR, oven, room heater thermostat, etc., and each is in communication with control block 12 such as by hard-wiring connection or, more preferably, by a wireless transceiver 24, 26 for communicating with transceiver 18. It is presently contemplated that Bluetooth transceivers which provide for communication between two or more devices within a range of 10 meters, for a normal power mode, and up to 300 meters, for a high power mode, will be employed in the appliances and control block in a manner known to those having ordinary skill in the art. As explained more fully below, each appliance A1, A2 has a corresponding appliance control module (ACM) offered by or on behalf of the appliance manufacturer and used by the local server 16 to operate the appliance.

The ACM is a software driver package that provides an interface to the services offered by the appliance. The ACM may accompany the appliance (e.g. as a diskette, CD or other software storage means included in the appliance packaging or offered by the appliance manufacturer), or may be available over the Internet. When an appliance is purchased, the ACM can be installed onto the local server in a manner well-known to those having ordinary skill, such as by inserting the ACM diskette into a computer disk drive. In a preferred embodiment, each

appliance will have a memory which contains a UL indicating an Internet address of the ACM. The appliance memory may also contain additional information such as an appliance model or serial number, etc.

The local controller 14 and local server 16 may be integrally formed in the control block 12, as shown in FIG. 1, and may be implemented by a wireless communications device having appropriate processing capabilities for operating or executing the appropriate ACM for a corresponding appliance. Mobile phones or PDAs and lap top computers having GSM capability may be suitable for this purpose. Alternatively, and as illustrated in the network 10 of FIG. 2, the local controller 14 may be separate and discrete from the local server 16. In this embodiment, the appliances A1, A2 are interfaced with the local server 16 in the same manner as in the network of FIG. 1 (e.g. using Bluetooth transceivers), with the local controller 14 used to provide appropriate commands to the local server. Thus, in the embodiment of FIG. 2, local controller 14 may be a standard mobile phone or other communications device with the local server function provided by a personal computer or other processing device located within an operating environment of the appliances (e.g. a home, office, etc.). In either case (i.e. the embodiment of FIG. 1 or FIG. 2), it should be understood that although only two appliances are shown, this is done for illustration only, and numerous appliances can be incorporated in the inventive network without departing from the scope of the invention.

With continued reference to FIG. 1, the control block 12 is connectable to a global computer network, such as the Internet 40, in any well known manner, such as through wireless or wired connection 30. As stated above, each appliance A1, A2 has a corresponding ACM

which may be provided with each appliance (e.g. a diskette, etc.) or which may be contained on or accessible via the Internet 40. If accessible over the Internet, the location of the corresponding ACM will be provided via an associated web site address or URL. For example, the desired ACM may be located at a general web site of the appliance manufacturer which may also contain general information about the manufacturer and its products, etc. Alternatively, the ACM may be located at a specific web site established by or with the authority of the appliance manufacturer for containing the appliance control modules of numerous appliances. In either case, the location of the desired ACM (e.g. the URL) is used by the control block 12 to access the ACM. The ACM will then be installed on the local server 16, in a manner known in the art, for controlling the corresponding appliance. Once installed, the appliance corresponding to the ACM can be controlled through the input of appropriate commands on the local controller 14 and through local wireless communication to the corresponding appliances.

Communication with the appliance for incorporating the appliance in the network 10 is initiated by the control block 12 such as through the local controller 16 by, in the case of a mobile telephone local controller, pressing an appropriate command or key or button on the mobile phone. This will cause the local controller to poll the appliances located within the local environment, e.g. within the Bluetooth transmission environment of 10 - 300 meters from the mobile phone. This is shown as step 3.1 in FIG. 3. The polling command will cause the polled appliances to transmit to the local controller the necessary ACM location information, such as the appliance manufacturer's URL, the appliance serial number, etc. (step 3.2). This information is then used by the local controller to determine whether a corresponding ACM is already installed

in the local server 16. If an ACM is needed, the local controller uses the URL and other received information from the appliance to access the Internet 40 to locate the ACM (step 3.3). Alternatively, the local controller may prompt a user to install a provided disc containing the ACM. Once the ACM is obtained, it is copied to either the local controller 14 or the local server 16 (step 3.4) and is installed on the local server (step 3.5) for operating the corresponding appliance.

Although for an Internet ACM location, the network 10 of FIG. 1 contemplates ACM transmission from the Internet to the control block 12, it will be appreciated that such transmission can occur directly or indirectly with the local controller 14 as shown in FIG. 2. In this embodiment, the local controller 14, such as a mobile phone, will access the Internet in a known manner and request the transmission of the desired ACM. The ACM can be transmitted directly to the mobile phone, which will then transmit it for storage and installation to the local server 16, or the ACM can be transmitted directly to the local server 16. In either case, the desired ACM is accessed from an Internet-stored location and installed onto the local server 16 for use in controlling a corresponding appliance (e.g. A1 or A2).

To ensure interoperability between different platforms, the appliance control module software can introduce the appliance as a remote method invocation (RMI) service with an appropriate Java interface. The appliance control modules can also be separately built for different operating systems and languages, in which case the appliance control module may be downloaded from the remote server URL as platform-dependent binary code. The operating system of the server appliance will then be automatically checked and a correct driver selected.

The appliance control modules can also include proprietary user interface solutions for different appliances. These can also be either platform-independent Java code or platform dependent binary code. When the driver has been loaded to the local server and access of the user to control the appliance has been checked (as explained below), the user can utilize the driver software to control the appliance.

The appliance control module user interface solution can be HTML based, or a combination of HTML and an operating-system dependent plug-in. The browser can be a WML browser or a HTML browser. Additionally, the browser can also support Java applets. Authentication of the remote server using, for example, screen script language (SSL) or other methods may be needed when new ACMs are downloaded from a remote server or whenever the appliance is accessed.

If the local server software is operating from a stationary PC, such as a PC located in a home containing the appliances, the local controller or phone can establish a connection with the PC as depicted in FIG. 2, and the PC will control the appliances. As explained above, the home control application can be a web server enabling local and global access to the home control application over the Internet. The PC can also utilize a wireless application protocol (WAP) gateway to enable the use of the home control application with WAP phones. In this manner, the local controller can access the local server via the Internet to instruct the control of certain appliances from a remote location. Locally, Bluetooth can be used to directly access the local PC based server from the local controller or phone. For example, if a mobile phone is used as a local controller 14, and in the case of controlling a room heat thermostat in a user's home containing

the local server 16, the phone will access the local server to command operation of the thermostat (e.g., to turn on/off, set temperature, etc.). This may be accomplished by accessing the local server via a Bluetooth connection when the user is in the home, or via an Internet connection outside of the user's home which provides access to the local server by using the phone. Once
5 accessed, the desired appliance and command will be selected by the user pressing appropriate buttons on the phone such as by selecting commands from a menu on the phone. Such functionality can also be employed to access other appliances, such as a VCR, by a user in a remote location instructing the local server to operate the VCR for recording a desired program, etc.

10 It is contemplated that, from time to time, manufacturers may update certain appliance control modules for various reasons such as to implement improved control features or correct operational defects, etc. Thus, the local controller or local server may contact the manufacturers' URL addresses to determine whether such updated ACMs exist, whereupon the updated ACMs will be installed on the local server 16 to replace or modify or upgrade existing
15 ACMs for that appliance.

For security purposes, it is desirable that only authorized users of appliances be given access to control such appliances. Thus, and in accordance with the present invention, an authentication feature is provided to determine whether a particular user is authorized to access a particular appliance. The authentication feature links the appliance and the local server to each
20 other with a designated user identification. This is easily implemented where, for example, the local server is a mobile phone, by using the SIM and PIN of the phone. If the local server is a

PC or other processor device, a password can be selected. When the local controller is first used to access a particular appliance, the local controller (e.g. phone) will be designated in the local server as a master controller for that device. The master controller device can then designate additional users to have access for controlling the particular appliance.

5 Thus, while there have shown and described and pointed out fundamental novel features of the invention as applied to a preferred embodiment thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices illustrated, and in their operation, may be made by those skilled in the art without departing from the spirit of the invention. For example, it is expressly intended that all combinations of those elements and/or method steps which perform substantially the same function in substantially the same way to achieve the same results are within the scope of the invention. Moreover, it should be recognized that structures and/or elements and/or method steps shown and/or described in connection with any disclosed form or embodiment of the invention may be incorporated in any other disclosed or described or suggested form or embodiment as a general matter of design choice. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.

10

15

CLAIMS

What is claimed is:

1. A method for networking and controlling appliances within a local environment containing a local controller and a local server, each appliance being controllable by

5 a corresponding appliance control module, comprising the steps of:

obtaining an appliance control module for each appliance;

installing on the local server, the obtained appliance control modules;

providing communication between the local server and the appliances; and

accessing the local server with the local controller to select one of the installed

10 appliance control modules for controlling the corresponding appliance.

2. The method of claim 1, wherein each appliance has a memory-stored address for providing a location of the corresponding appliance control module, said method further comprising the steps of transmitting the memory-stored address from the appliance to the
15 local controller, and accessing a remote location using the transmitted address to locate the corresponding appliance control module.

3. The method of claim 2, wherein the local controller, local server and each appliance contains a wireless transceiver, and wherein said step of transmitting comprises the step
20 of wirelessly transmitting.

4. The method of claim 2, wherein the memory-stored address is a URL
Internet address.

5. The method of claim 4, wherein said accessing step comprises the step of
5 connecting to the Internet using the URL to locate the appliance control module.

6. The method of claim 1, wherein the local controller and the local server
comprise an integrally formed wireless communications device.

7. The method of claim 6, wherein said wireless communications device
comprises one of a mobile phone and a personal digital assistant.

8. The method of claim 2, wherein the local controller comprises one of a
mobile telephone and a personal digital assistant.

9. The method of claim 8, wherein said local server comprises a personal
computer.

10. The method of claim 1, wherein the appliances, local server and local
20 controller are capable of wirelessly communicating with each other using Bluetooth transceivers.

11. The method of claim 2, wherein the appliances, local server and local controller are capable of wirelessly communicating with each other using Bluetooth transceivers.

12. The method of claim 1, wherein the step of accessing further comprises
5 providing a select user with access to the appliances based on a user identifier.

13. The method of claim 12, wherein the local controller is a mobile phone and wherein said step of providing a user with access further comprises using a SIM and PIN associated with the phone as the user identifier.

14. The method of claim 12, wherein the local server is a personal computer and wherein said step of providing a user with access further comprises using a personal computer password as the user identifier.

15. The method of claim 2, wherein said step of transferring comprises the step of accessing the remote location comprises transferring the located appliance control module to the local controller and then transferring the appliance control module from the local controller to the local server.

16. The method of claim 1, further comprising the step accessing the local server with the local controller to control a select appliance with a corresponding appliance control module.

5 17. The method of claim 1, wherein the local controller comprises a mobile phone and wherein said accessing step comprises the step of selecting a command on the mobile phone to control a select appliance.

10 18. The method of claim 13, further comprising the steps of using the local controller to grant a second device authority for accessing the local server.

19. A network for controlling appliances within a local environment containing a local controller and a local server, each appliance being controllable by a corresponding appliance control module, comprising:

15 means for obtaining an appliance control module for each appliance;
means for installing on the local server, the obtained appliance control modules;
means for providing communication between the local server and the appliances;

and

20 means for accessing the local server with the local controller to select one of the installed appliance control modules for controlling the corresponding appliance.

20. The network of claim 19, wherein each appliance has a memory-stored address for providing a location of the corresponding appliance control module, said network further comprising means for transmitting the memory-stored address from the appliance to the local controller, and means for accessing a remote location using the transmitted address to locate the corresponding appliance control module.

21. The network of claim 20, wherein the local controller, local server and each appliance contains a wireless transceiver, and wherein said means for transmitting comprises means for wirelessly transmitting.

22. The network of claim 20, wherein the memory-stored address is a URL Internet address.

23. The network of claim 22, wherein said means for accessing comprises the step of connecting to the Internet using the URL to locate the appliance control module.

24. The network of claim 20, wherein the local controller and the local server comprise an integrally formed wireless communications device.

25. The network of claim 24, wherein said wireless communications device comprises one of a mobile phone and a personal digital assistant.

26. The network of claim 20, wherein the local controller comprises one of a mobile telephone and a personal digital assistant.

5 27. The network of claim 26, wherein said local server comprises a personal computer.

28. The network of claim 19, wherein the appliances, local server and local controller are capable of wirelessly communicating with each other using Bluetooth transceivers.

10 29. The network of claim 20, further comprising means for providing a select user with access to the appliances based on a user identifier.

15 30. The network of claim 29, wherein the local controller is a mobile phone and wherein said means for providing a user with access further comprises using a SIM and PIN associated with the phone as the user identifier.

20 31. The network of claim 19, wherein the local server is a personal computer and wherein said means for providing a user with access further comprises using a personal computer password as the user identifier.

32. The network of claim 19, wherein said means for transferring comprises means for transferring the located appliance control module to the local controller and means for transferring the appliance control module from the local controller to the local server.

5 33. The network of claim 32, wherein the local controller comprises a mobile phone and wherein said means for accessing comprises entering a menu selection on the mobile phone.

34. The network of claim 30, further comprising means for the local controller to grant a second device authority for accessing the local server.

10 35. A network for controlling an appliance contained within a local environment, the appliance being controllable by a corresponding appliance control module and having a memory-stored address for providing a location of the corresponding appliance control module, comprising:

15 a local controller having a wireless transceiver for communicating with the appliance and for receiving the memory-stored address from the appliance, the memory-stored address being used to locate the appliance control module;

20 a local server in communication with said local controller for receiving and storing the located appliance control module.

36. The network of claim 35, wherein the memory-stored address corresponds to a location on a global computer network and wherein at least one of said local controller and local server is capable of communicating with said global computer network.

5 37. The network of claim 35, wherein said local controller is a mobile phone.

38. The network of claim 36, wherein said local controller is a mobile phone.

39. The network of claim 38, wherein said mobile phone is used to access the
10 global computer network to locate the appliance control module and to transmit the appliance control module to said local server.

40. The network of claim 38, wherein said mobile phone, said local server and
the appliance comprise Bluetooth transceivers for permitting wireless communication
15 therebetween.

ABSTRACT OF THE DISCLOSURE

5

FIG. 1 is a block diagram of a system 10 for controlling appliances via a local server and a Bluetooth network. The system includes a local controller 14 and a local server 16, which are connected to a Bluetooth network 18. The Bluetooth network 18 is connected to two appliances, APPLIANCE A1 22 and APPLIANCE A2 28, via Bluetooth modules 24 and 26, respectively. The Bluetooth network 18 is also connected to the Internet 40 via a network 30. The Internet 40 includes two access control modules, ACM1 and ACM2.

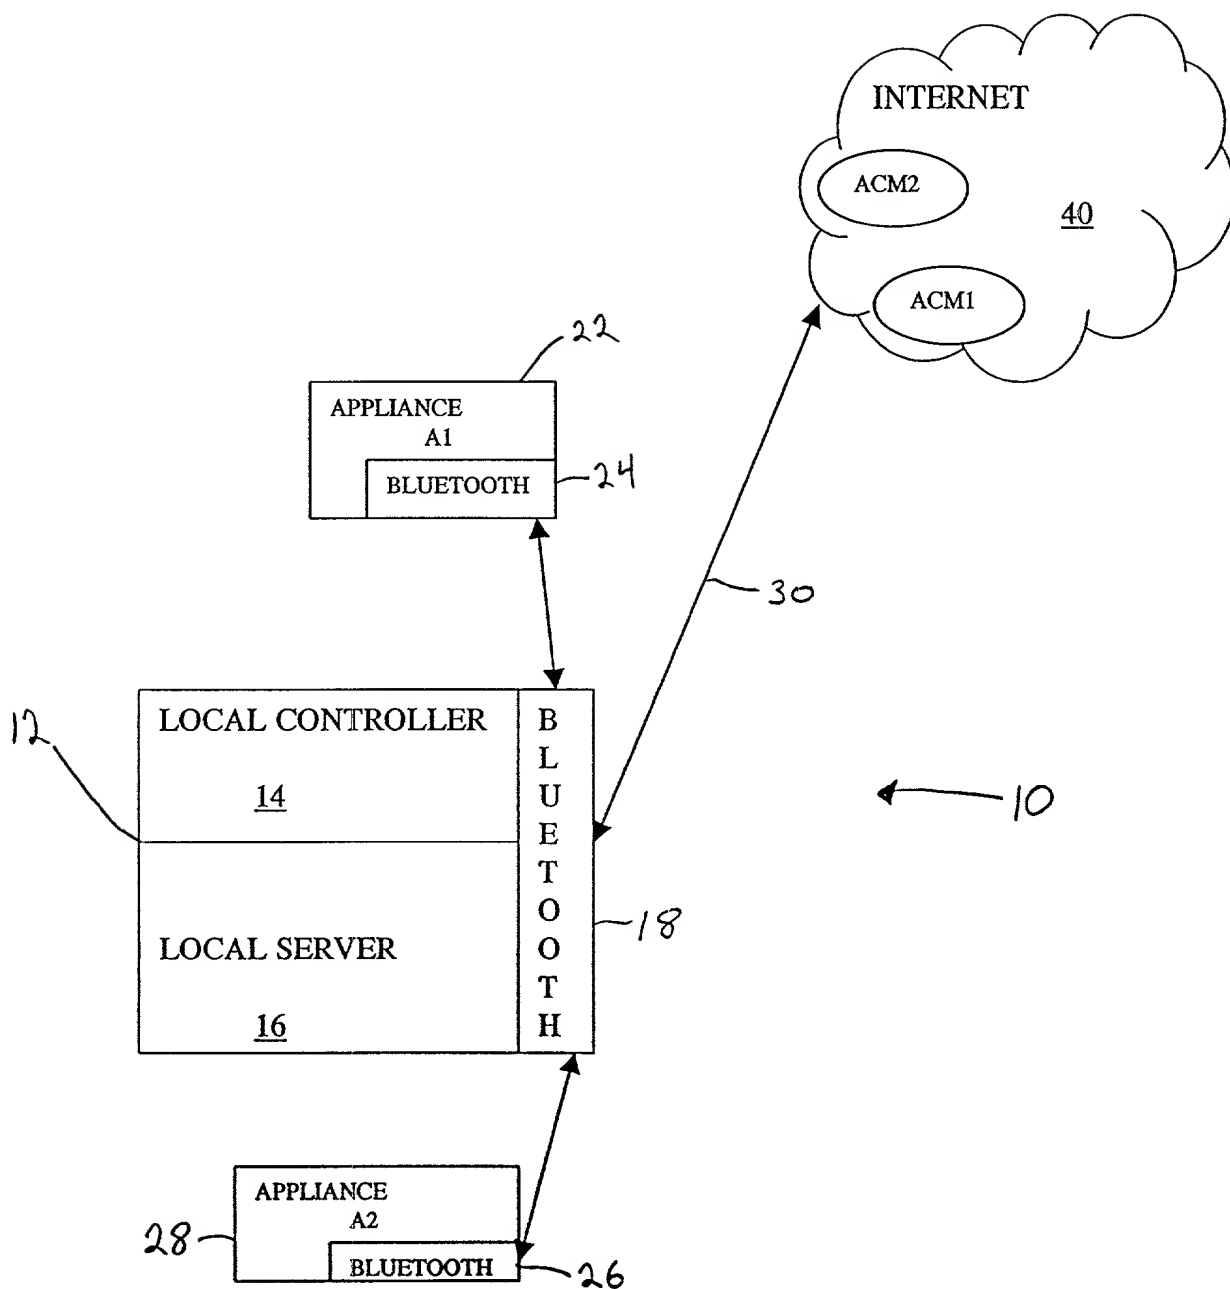


FIG. 1

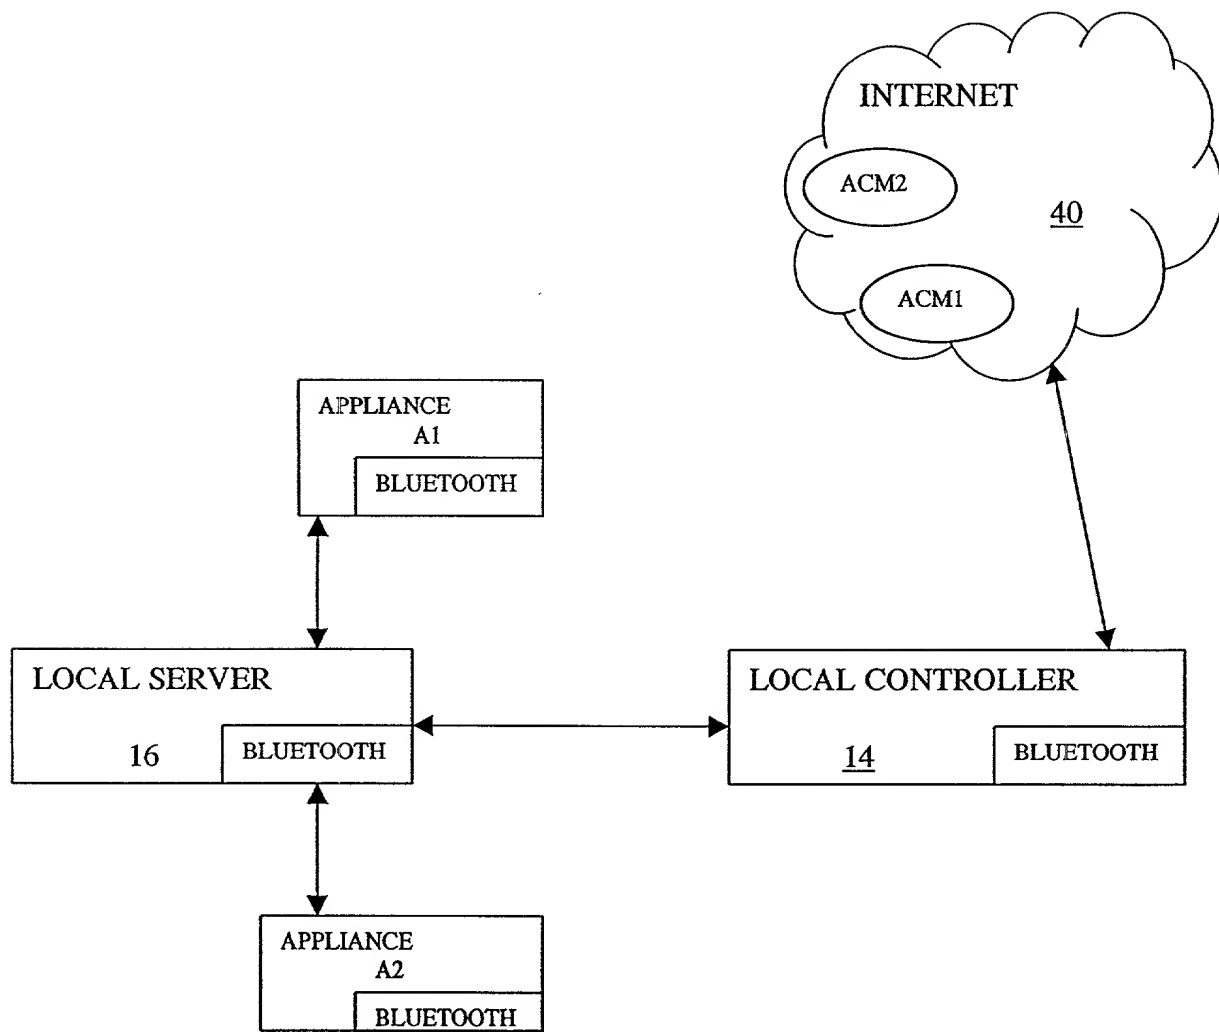


FIG. 2

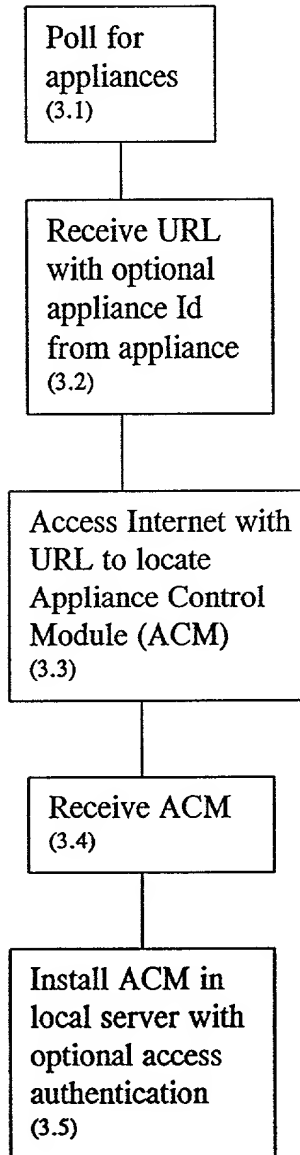


FIG. 3

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

NETWORK AND METHOD FOR CONTROLLING APPLIANCES

the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I also acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37 CFR 1.63(d), which occurred between the filing date of the prior application and the filing date of the continuation-in-part application, if this is a continuation-in-part application.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application:

Country:

Appln. No.:

Filed:

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD M. WEISZ, Reg. No. 37,257; JULIA S. KIM, Reg. No. 36,567; VINCENT M. FAZZARI, Reg. No. 26,879; ALFRED W. FROEBRICH, Reg. No. 38,887; KENT H. CHENG, Reg. No. 33,849; GEORGE WANG, Reg. No. 41,419; TZVI HIRSHAUT, Reg. No. 38,732, GERALD J. CECHONY, Reg. No. 31,335; ROGER S. THOMPSON, Reg. No. 29,594 and JOY I. FARBER, Reg. No. 44,103.

Address all telephone calls to Edward M. Weisz, Esq. at telephone No. (212) 687-2770.

Address all correspondence to:

Edward M. Weisz, Esq.
Cohen, Pontani, Lieberman & Pavane
551 Fifth Avenue, Suite 1210
New York, New York 10176

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor: Hannu NIEMINEN

Inventor's signature: _____

Dated: _____
Month/Day/Year

Residence: **Houkkalammintie 11
37560 Lempäälä, Finland**

Citizenship: **Finnish**

Post Office Address: **Houkkalammintie 11
37560 Lempäälä, Finland**

Full Name of Second Joint Inventor: Iikka SALMINEN

Inventor's signature: _____

Dated: _____
Month/Day/Year

Residence: **Parolantie 9 D 39**
13130 Hämeenlinna, Finland

Citizenship: **Finnish**

Post Office Address: **Parolantie 9 D 39**
13130 Hämeenlinna, Finland

Full Name of Third Joint Inventor: Timo TUOMISTO

Inventor's signature: _____

Dated: _____
Month/Day/Year

Residence: **Liukuslahdentie 4**
37120 Nokia, Finland

Citizenship: **Finnish**

Post Office Address: **Liukuslahdentie 4**
37120 Nokia, Finland